



ComScreen™: Multi-Channel Communications Surface



Traditional touchscreen tablets typically fall short with their small speakers and insufficient microphone clarity.

With superb audio fidelity and echo cancellation, ComScreen™ is the latest VCOM Compatible™ user station certified for use with VCOM™ Virtual Intercom systems and optimized for desktop use. ComScreen has a large speaker and strategically placed internal microphone for bringing intercom audio up close and personal without the need for a hampering gooseneck microphone.

With all the operational features VCOM™ users are familiar with, ComScreen provides a compact solution for a variety of desktop user station requirements.

IntraCom Systems, LLC
(888) 318-6187
info@intracomsystems.com
www.intracomsystems.com

VCOM Virtual Communications is Patented -- U.S. Patent #8,660,039
Specifications and features subject to change. 4/12/16 Copyright © 2016




Key Features

- Customized pre-installed VCOM User Interface
- Full duplex integrated speaker/mic with superb echo cancellation
- 7" TFT capacitive touchscreen
- Ethernet WAN RJ-45 10/100/1000
- Optional handset well cover
- Power over Ethernet (PoE)
- Voice Activity Detection (VAD)
- Adaptive jitter buffer
- Full, wide, or narrow bandwidth
- Ethernet LAN Port RJ-45 Loop through
- Upgrade/Provisioning Firmware upgrade via TFTP / HTTP / HTTPS or local file, mass provisioning
- VCOM application upgrades auto downloadable via server
- Android OS
- Integrated base stand with 2 adjustable angles. Wall mountable.

Technical Specifications

- Graphic Display: 7 inch (1024x600) capacitive (5 points) touchscreen TFT LCD
- Network Interface: Dual switched 10/100/1000 Mbps ports / integrated PoE
- Bluetooth: 4.0 + EDR
- Auxiliary Ports: RJ9 handset jack, RJ9 headset jack, mini-HDMI
- Wi-Fi: 802.11 b/g/n
- Feature Keys: 2 function keys VOLUME +/-
- HD Audio handset & speakerphone
- Power & Green Energy Efficiency Universal power adapter included: Input 100-240VAC 50-60Hz; Output 12VDC, 1.5A (18W) Integrated PoE+ 802.3at, Class 4
- Physical Dimension: 252mm (W) x 211mm (L) x 84mm (H)
- Unit Weight: 1.08kg; Package Weight: 1.77kg
- Temperature and Humidity Operation: 0°C to 40°C, Storage: -10°C to 60°C,
- Humidity: 10% to 90% Non-condensing

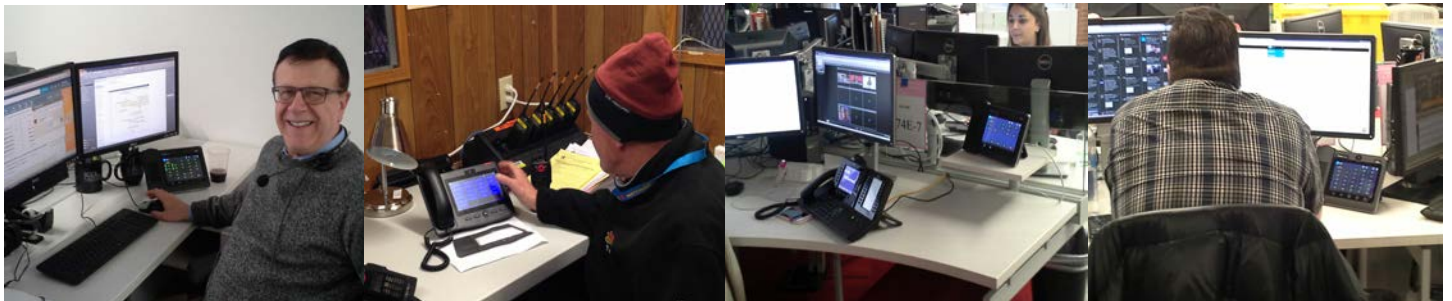

IntraCom Systems, LLC
(888) 318-6187
info@intracomsystems.com
www.intracomsystems.com

VCOM Virtual Communications is Patented -- U.S. Patent #8,660,039
Specifications and features subject to change. 4/12/16 Copyright © 2016

SysDo Ltd.
TL 972-39338999
Fax 972-39337233
SYSDO USA INC.
TL 1-818-2134341
Fax 1-844-3612990