


Lightweight 2 wire surveillance Kit


SK-65/SK-66

Main Features


- Hi Quality Mic
- Heavy duty strain relief
- Crystal clear voice reception.

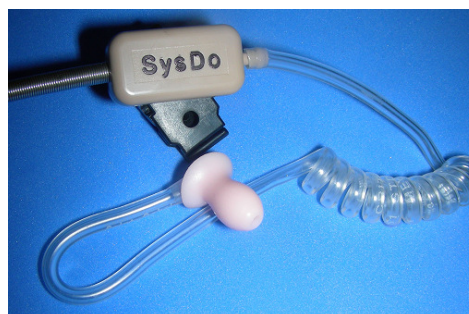

Rx type:	Dynamic
Rx impedance:	150- 300 Ohm (Each Side)
Rx sensitivity:	109dB SPL @1kHz, 1mW
Frequency Response:	100 – 14KHz
Ear:	Surveillance audio tube
Tx type:	High quality Omni directional microphone
Tx sensitivity:	-65dBV/Pa @1cm
Tx impedance:	1.2 Kohm
Frequency Response:	200 – 10KHz
Plug:	Hirose (Upon Customer Request)
PTT:	SPT-1X (SysDo), ABS, <30 mΩ Typically 10 mΩ
Length of the cord:	180 c"m (Upon Customer Request)

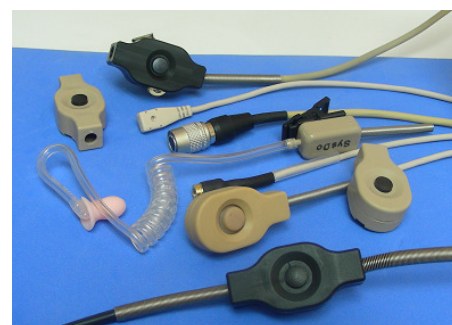

Part No. : SK-65-000 ; SK-66-000



C-Audio
Clear Voice Solutions

SysDo Ltd.

1 Pamomit St. Magshimim 56910, ISRAEL
Tel. 972-3-9338999 Fax. 972-3-9337233
Email: sales@sysdo.net Website www.sysdo.net